


Audi A4 and A6 (1995 - 1999)

On some older vehicles it is not possible to reset the SRI by using the service tool. The manufacturers of these vehicles generally have bespoke service reset tools specifically for this task. However on a number of vehicles, it is possible to reset the SRI via interfaces built into the vehicle. The following are some of the most common SRI manual reset procedures.

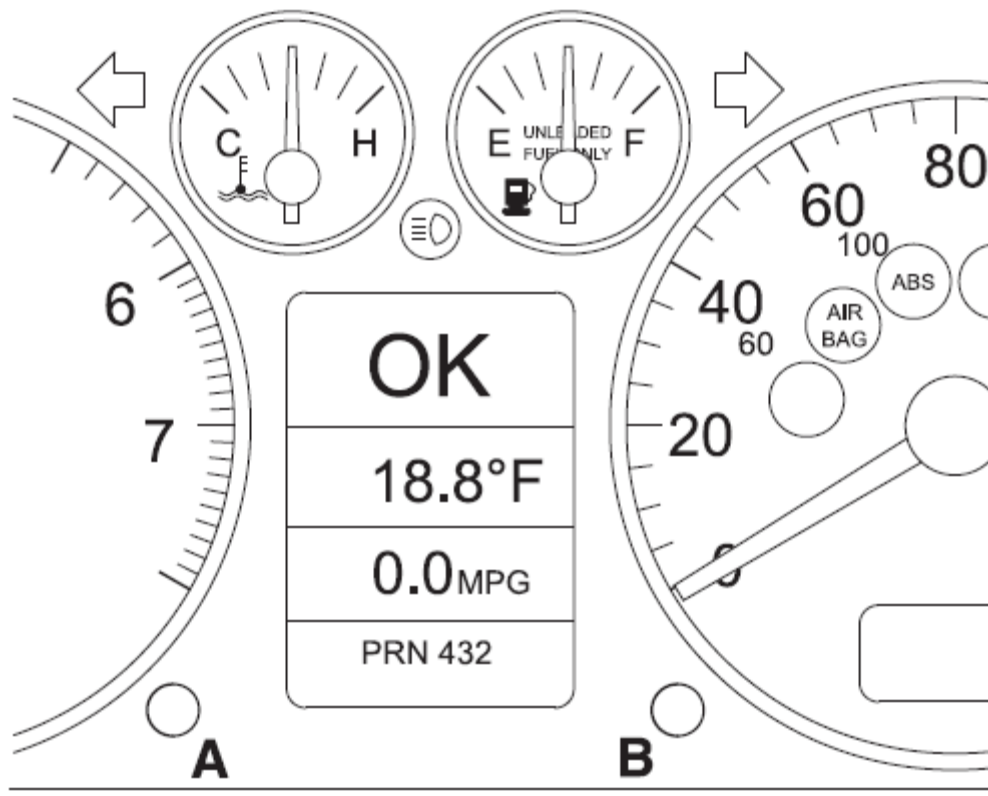

1. With the ignition switch in the OFF position, press and hold button A whilst turning the key to the ON position.
2. The message 'Service OIL' will appear. If the message does not display, repeat step 1.
3. Pull out the button B until the message is extinguished.
4. The display should now show 'Service ---', indicating that the SRI has been reset.